



Project: _____

Catalog#: _____

Notes: _____

Date: _____

Type: _____

LED TRADITIONAL HALF CUT-OFF WALL PACK



APPLICATIONS

- EXTERIOR WALLS
- FACTORY
- LANDSCAPING
- SCHOOLS
- CHURCHES
- HOTELS
- AIRPORTS
- OFFICE BUILDINGS
- FAST FOOD RESTAURANTS
- CITY HALL
- HISTORICAL AREAS
- OTHER OUTDOOR APPLICATIONS



KEY FEATURES

CONSTRUCTION

Traditional style Half Cut-Off Wall Pack LED Luminaire that boasts brilliant aesthetics and energy savings. Sturdy die-cast Aluminum housing finished with Bronze corrosion-free powder coating. Surge Protection up to 4kV built-in.

OPTICAL SYSTEM

Polycarbonate Lens Type I Optics come standard and projects light into a wide open space evenly. Fully sealed against dirt & bugs. Unique design feature sets the perfect light. Optional: Button Photocell or Swivel Photocell.

CERTIFICATION

UL/cUL Listed, RoHS, CE, FCC compliant; with LM79 & LM80, IP65 Rated.

ELECTRICAL

Luminaire is available in 40W, 60W, 90W, & 120W
High lumen efficacy 140lm/W, Non-Dimming, Isolated Driver
Universal 100-277VAC, 50/60Hz. 40W=5,629 LM,
60W=8,268 LM—90W=11,986 LM—120W=16,433 LM.

INSTALLATION

Easy installation on standard junction box or surface mount. 3 total 3/4" threaded knockouts for easy access to conduit & controls.
Flicker free. CCT: 5000K.

WARRANTY

Industry leading Five (5) year manufacturer warranty in the USA.

ORDERING

MODEL NUMBER(S)

MODEL NUMBER	POWER	LUMENS PER WATT	LUMENS	COLOR TEMPERATURE	CRI	LIFE HOURS
CLED-WA040W	40 WATTS	140 LPW	5,629 LM	50=5000K	70+	50,000HRS.
CLED-WA060W	60 WATTS	140 LPW	8,268 LM	50=5000K	70+	50,000HRS.
CLED-WA090W	90 WATTS	140 LPW	11,986 LM	50=5000K	70+	50,000HRS.
CLED-WA0120W	120 WATTS	140 LPW	16,433 LM	50=5000K	70+	50,000HRS.

40W LED TRADITIONAL HALF CUT-OFF WALL

PERFORMANCE DATA



ACCESSORIES





SWIVEL PHOTOCELL




BUTTON PHOTOCELL

DIMENSIONS

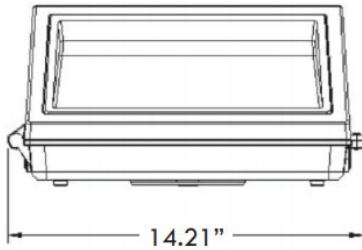

PHOTOMETRICS

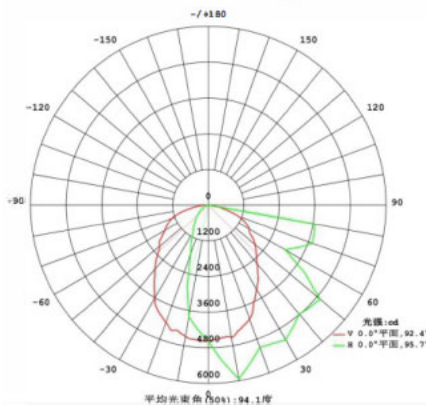

MODEL TECHNICAL SUMMARY

CLED-WA040W-50

INPUT WATTS	40 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	140 lm/W
LED CHIPS	SMD 3030
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	5,629 LM
COLOR TEMPERATURE	50=5000K
CRI	80+
WORKING TEMPERATURE	-20°C - +40°C
STORAGE TEMPERATURE	-30°C - +50°C
IP RATING	IP65
CERTIFICATION	UL CE FCC RoHS
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	Button / Swivel Photocell
DIMMABLE	Non-Dimmable
BEAM ANGLE	120°
THD	<10%
POWER FACTOR	>0.90
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.21" * 7.36" * 9.25"



60W LED TRADITIONAL HALF CUT-OFF WALL

PERFORMANCE DATA



ACCESSORIES





SWIVEL PHOTOCELL




BUTTON PHOTOCELL

DIMENSIONS

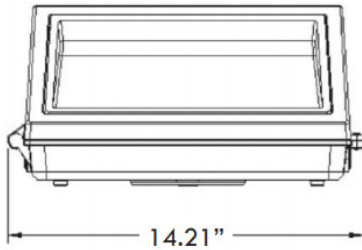

PHOTOMETRICS

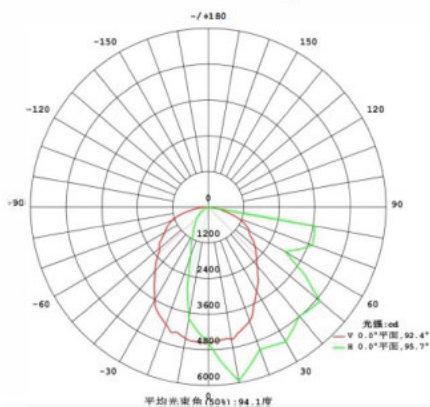

MODEL TECHNICAL SUMMARY

CLED-WA060W-50

INPUT WATTS	60 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	140 lm/W
LED CHIPS	SMD 3030
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	8,268 LM
COLOR TEMPERATURE	50=5000K
CRI	80+
WORKING TEMPERATURE	-20°C - +40°C
STORAGE TEMPERATURE	-30°C - +50°C
IP RATING	IP65
CERTIFICATION	UL CE FCC RoHS
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	Button / Swivel Photocell
DIMMABLE	Non-Dimmable
BEAM ANGLE	120°
THD	<10%
POWER FACTOR	>0.90
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.21" * 7.36" * 9.25"



90W LED TRADITIONAL HALF CUT-OFF WALL

PERFORMANCE DATA



ACCESSORIES





SWIVEL PHOTOCELL




BUTTON PHOTOCELL

DIMENSIONS

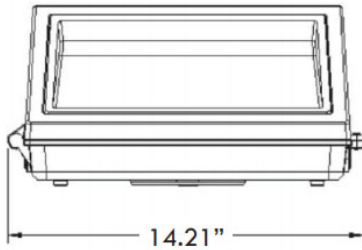

PHOTOMETRICS

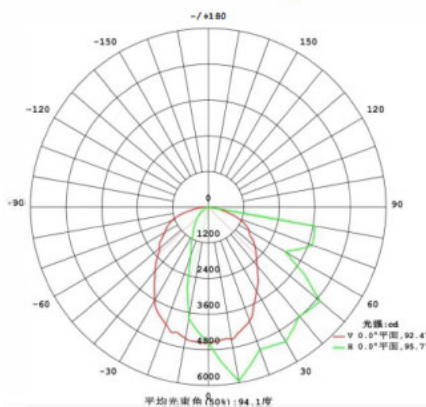

MODEL TECHNICAL SUMMARY

CLED-WA090W-50

INPUT WATTS	90 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	140 lm/W
LED CHIPS	SMD 3030
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	11,986 LM
COLOR TEMPERATURE	50=5000K
CRI	80+
WORKING TEMPERATURE	-20°C - +40°C
STORAGE TEMPERATURE	-30°C - +50°C
IP RATING	IP65
CERTIFICATION	UL CE FCC RoHS
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	Button / Swivel Photocell
DIMMABLE	Non-Dimmable
BEAM ANGLE	120°
THD	<10%
POWER FACTOR	>0.90
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.21" * 7.36" * 9.25"



120W LED TRADITIONAL HALF CUT-OFF WALL

PERFORMANCE DATA



ACCESSORIES





SWIVEL PHOTOCELL




BUTTON PHOTOCELL

DIMENSIONS

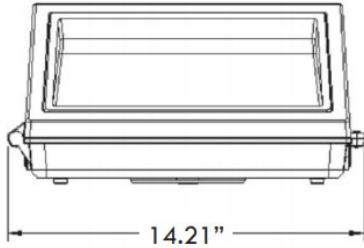

PHOTOMETRICS

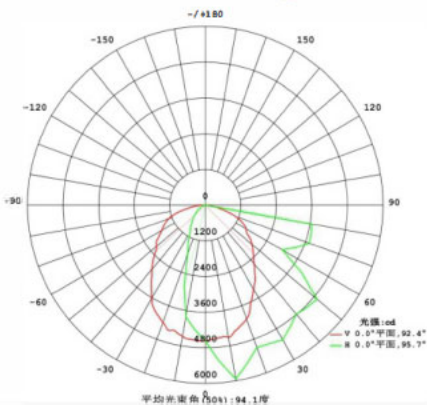

MODEL TECHNICAL SUMMARY

CLED-WA120W-50	
INPUT WATTS	120 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	140 lm/W
LED CHIPS	SMD 3030
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	16,433 LM
COLOR TEMPERATURE	50=5000K
CRI	80+
WORKING TEMPERATURE	-20°C - +40°C
STORAGE TEMPERATURE	-30°C - +50°C
IP RATING	IP65
CERTIFICATION	UL CE FCC RoHS
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	Button / Swivel Photocell
DIMMABLE	Non-Dimmable
BEAM ANGLE	120°
THD	<10%
POWER FACTOR	>0.90
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	14.21" * 7.36" * 9.25"

