



Project:	
Catalog#:	
Notes:	Date:
Type:	

## COMMERCIAL STRIP LIGHT 3CCT TUNABLE

### APPLICATIONS

- LOBBY LIGHTING
- HOTEL
- MEETING ROOMS
- SCHOOLS
- STAIRCASES
- SHOPPING CENTERS
- HALLWAY
- WAREHOUSES
- OFFICE BUILDINGS
- FAST FOOD RESTAURANTS
- FACTORY
- OTHER INDOOR APPLICATIONS



### KEY FEATURES

#### CONSTRUCTION

Slim Aluminum Housing design LED Strip / Low Bay. Features 3CCT Tunable Switch for quick color changes. Environmentally friendly polyester powder coatings are formulated for high durability and long lasting color. IP20 Rated. Suitable for damp location.

#### OPTICAL SYSTEM

Heat resistant polycarbonate lens diffuser. Superior light distribution that is even & glare-free. High reflective coating with 120° beam angle. Optional: Continuous Row Plate

#### CERTIFICATION

ETL, RoHS, CE, FCC, and DLC Listed, FCC listed; with LM79 & LM80, & IP20 Rated.

#### ELECTRICAL

4FT Luminaire is available in: 40W producing 5,200 Lumens.  
8FT Luminaire is available in: 60W producing 6,600 Lumens.  
High lumen efficacy 130lm/W.0-10V Dimming, Class-2 Driver.  
Optional: EM Battery, Internal or External Sensor (Daylight/Bi-

#### INSTALLATION

Easy installation. Surface Mount, Pendant Mount, or Chain Mount. Motion Sensor is integrated for better performance. Lens is removable. Flicker free. 3CCT Tunable: 3000K/4000K/5000K Switch.

#### WARRANTY

Industry leading Five (5) year manufacturer warranty in the USA.


### ORDERING

### MODEL NUMBER(S)

MODEL NUMBER	POWER	LUMENS PER WATT	LUMENS	LENGTH	COLOR TEMPERATURE SWITCH	CRI	LIFE HOURS
DM-ST4FT40	40 Watts	130	5,200 LM	4 FT	3CCT: 3000K/4000K/5000K	80+	50,000
DM-ST8FT64	64 Watts	130	8,600 LM	8 FT	3CCT: 3000K/4000K/5000K	80+	50,000

# 40W 4FT 3CCT TUNABLE LED STRIP LIGHT

## PERFORMANCE DATA

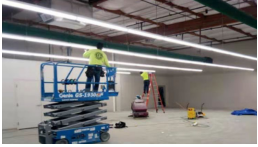

## OPTIONAL ACCESSORIES



EM Battery Backup (90 min)




Sensor



Continuous Row Plate



## DIMENSIONS

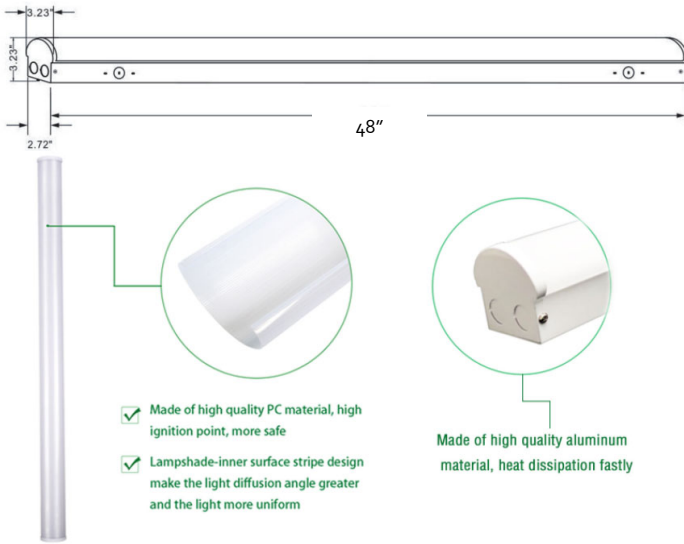

## MODEL TECHNICAL SUMMARY


DM-ST4FT40	
INPUT WATTS	40 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	130 lm/W
LED CHIPS	SMD2835 LEDS
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	5,200 LM
COLOR TEMPERATURE	3CCT: 3000K/4000K/5000K
CRI	80+
WORKING TEMPERATURE	-30°C - +40°C
STORAGE TEMPERATURE	-30°C - +60°C
IP RATING	IP20
CERTIFICATION	ETL CE FCC RoHS DLC LISTED
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	EM Battery / Occupancy Sensor / Continuous Row Plate
DIMMABLE	0-10V-Dimmable
BEAM ANGLE	120°
THD	<15%
POWER FACTOR	>0.9
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	48.00" * 2.72" * 3.23"

## PHOTOMETRIC

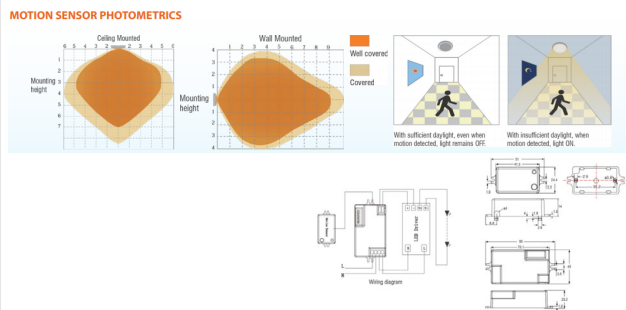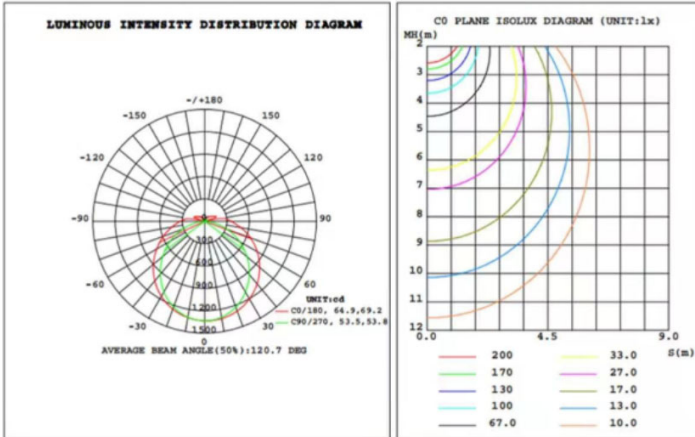

# 64W 8FT 3CCT TUNABLE LED STRIP LIGHT

## PERFORMANCE DATA

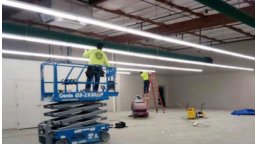


## OPTIONAL ACCESSORIES



EM Battery Backup (90 min)



Sensor



Continuous Row Plate

## DIMENSIONS



- ✓ Made of high quality PC material, high ignition point, more safe
- ✓ Lampshade-inner surface stripe design make the light diffusion angle greater and the light more uniform


Made of high quality aluminum material, heat dissipation fastly

## MODEL TECHNICAL SUMMARY

### DM-ST8FT64

INPUT WATTS	64 Watts
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	130 lm/W
LED CHIPS	SMD2835 LEDS
LED DRIVER	CONSTANT POWER
DELIVERED LUMENS	8,600 LM
COLOR TEMPERATURE	3CCT: 3000K/4000K/5000K
CRI	80+
WORKING TEMPERATURE	-30°C - +40°C
STORAGE TEMPERATURE	-30°C - +60°C
IP RATING	IP20
CERTIFICATION	ETL CE FCC RoHS DLC LISTED
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	EM Battery / Occupancy Sensor / Continuous Row Plate
DIMMABLE	0-10V-Dimmable
BEAM ANGLE	120°
THD	<19%
POWER FACTOR	>0.9
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	96.00" * 2.72" * 3.23"

## PHOTOMETRIC

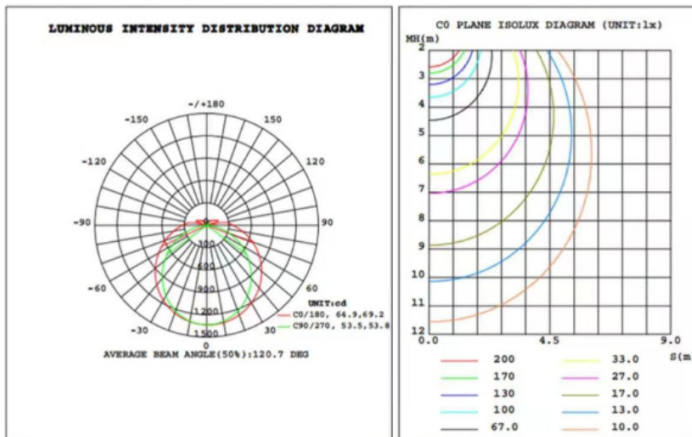

### MOTION SENSOR PHOTOMETRICS

