



Project:	
Catalog#:	
Notes:	Date:
Type:	

LED LINEAR WRAP AROUND 3CCT & 3-WATT SELECT



- 3500K
 - 4000K
 - 5000K
- Selectable

APPLICATIONS

- WAREHOUSES
- AIRPORTS
- SUPER MARKETS
- OFFICE SPACES
- LIBRARY'S
- OFFICE BUILDINGS
- SCHOOLS
- FAST FOOD RESTAURANTS
- CHURCHES
- RESIDENTIAL GARAGES
- SHOPPING CENTERS
- OTHER INDOOR APPLICATIONS



KEY FEATURES

CONSTRUCTION

Heat resistant acrylic lens diffuser with steel body. Suitable for damp location. 4FT Length

CONTROLS AND DIMMING

The LED Wrap Around Light comes standard with a 0-10V Dimming Driver. Optional Emergency Battery available can be controlled by with a Motion Sensor and/or Daylight Sensor.

CERTIFICATION

Luminaire is ETL Listed, CE , RoHS, and IP20 Rated. DLC Standard Listed on the QPL. Title 24 .

ELECTRICAL

The Luminaire is available with a standard 120-277V. Luminous efficacy up to 130 lm/W. No Mercury, No U.V. Flicker-Free Startup.

INSTALLATION

The LED Wrap Around Luminaire is suitable for Indoor applications. Surface mountable or Hanging mountable. Hanging clips, included.

WARRANTY

Industry leading Five (5) year manufacturer warranty in the USA.

ORDERING

MODEL NUMBER(S)

MODEL NUMBER	WATT SELECTABLE SWITCH	LUMENS PER WATT	LUMENS	SIZE	CCT TUNABLE SWITCH	CRI	LIFE HOURS
DM-WR4FT303540W-3545K	3-Wattages:30W/35W/40W	130LPW	3,900LM 4,550LM 5,200LM	4 FT	3CCT: 35K/40 K/50K	>80	50,000 HRS.

3CCT/3WATTAGE LED WRAP AROUND

PERFORMANCE DATA



OPTIONS



EM BATTERY BACKUP




MOTIONS SENSOR




(INCLUDED)

DIMENSIONS

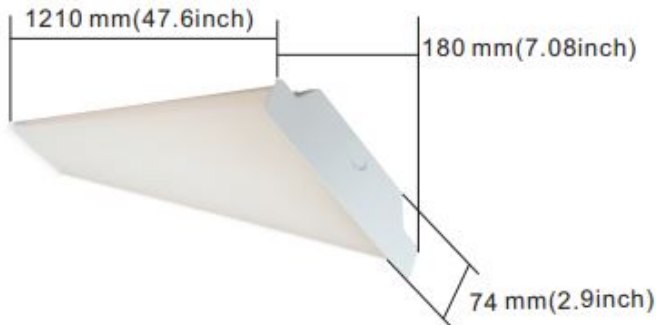

FIELD SELECTABLE SWITCHES

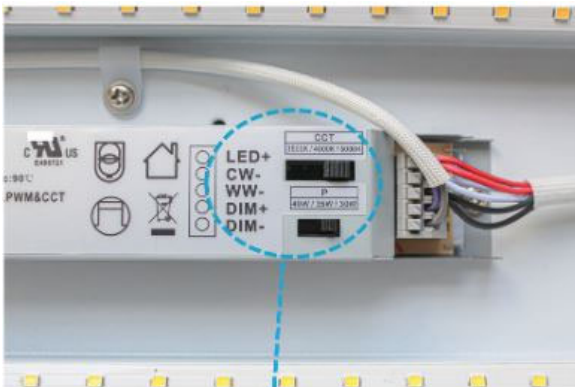

CCT&Power Tunable

MODEL TECHNICAL SUMMARY

DM-WR4FT303540W-3545K

INPUT WATT SELECTABLE	30W / 35W / 40W
INPUT VOLTAGE	AC 120-277V
POWER FREQUENCY	50 / 60 HZ
EFFICACY	130 lm/W
LED CHIPS	3030 LED CHIPS
LED DRIVER	LIFUD
3-WATTAGE SELECT SWITCH	3,900 LM / 4,550 LM / 5,200 LM
3CCT COLOR TEMPERATURE	3500K / 4000K / 5000K SWITCH
CRI	RA>80
WORKING TEMPERATURE	-25°C - +40°C
STORAGE TEMPERATURE	-25°C - +40°C
IP RATING	IP20
CERTIFICATION	ETL CE FCC DLC Standard
WARRANTY TIME	5 Years
OPTIONAL ACCESSORY	EM Backup/ Bi-Level Motion or Microwave Sensor
DIMMABLE	0-10V Dimmable
BEAM ANGLE	120°
THD	<20%
POWER FACTOR	>0.9
L70 (HOURS)	50,000
DIMENSIONS (L*W*H) INCHES	47.6**7.08**2.9**

CREATE 8FT OR LONGER LENGTHS

